



Base monoblocco con valvola limitatrice di pressione, circuito in serie – luce 6
Manifold plate for solenoid valves with relief valve, series circuit – NG6

mod. **BEC3-VLP45-n-S**

Corpo in alluminio
Aluminium Body

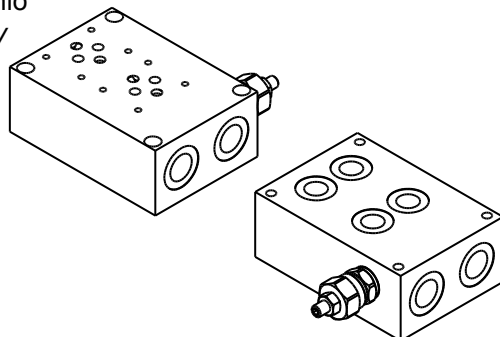

Portata massima <i>Max flow</i>	40 l/min 10.5 gpm
Pressione massima <i>Max pressure</i>	280 bar 4000 psi

Modello <i>Type</i>	P,T	A,B	L
BEC3-VLP45-2-S	1/2" GAS	3/8" GAS	122
BEC3-VLP45-3-S	1/2" GAS	3/8" GAS	172
BEC3-VLP45-4-S	1/2" GAS	3/8" GAS	222
BEC3-VLP45-5-S	1/2" GAS	3/8" GAS	272
BEC3-VLP45-6-S	1/2" GAS	3/8" GAS	322
BEC3-VLP45-7-S	1/2" GAS	3/8" GAS	372
BEC3-VLP45-8-S	1/2" GAS	3/8" GAS	422





Taratura <i>Setting</i>		
Codice <i>Code</i>	Taratura standard <i>Standard setting (Q=5 l/min)</i>	Campo di taratura <i>Adj. Pressure range</i>
00	40 bar 580 psi	5÷40 bar 72.5÷580 psi
01	80 bar 1160 psi	20÷100 bar 290÷1450 psi
02	180 bar 2600 psi	40÷250 bar 580÷3600 psi
03	250 bar 3600 psi	60÷350 bar 870÷5000 psi

Dati e tarature ottenuti usando olio con viscosità 30 cSt a 50°C
Performances and calibrations are carried out by using hydraulic oil with 30 cSt viscosity at 50°C

Viscosità consigliate <i>Recommended viscosity</i>	10 ÷ 420 cSt
Temperatura di lavoro <i>Working temperature</i>	-20 ÷ +90 °C
Filtrazione assoluta <i>Absolute filtration</i>	25 µ

Sigla di ordinazione / *Ordering code*

BEC3-VLP45-3-S	02	A
Modello <i>Type</i>	Codice taratura <i>Setting code</i> 00, 01, 02, 03	Codice regolazione <i>Adjustment code</i> A, B, C, D

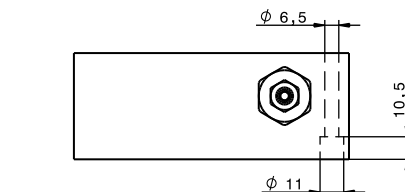

Regolazioni
Adjustments

A Es. 4 Es. 13 max. 7.7	B Es. 13 max. 110	C 8.7	D Es. 13 8.8
Vite esterna esagono incassato <i>Leakproof hex socket screw</i>	Volantino e dado <i>Handknob and locknut</i>	Piombatura <i>Sealing cap</i>	Cappello <i>Cap</i>

I dati non sono impegnativi, **CBF** si riserva di apportare modifiche senza preavviso.
The specifications are not binding, CBF reserves the right to introduce modifications without notice.